

5100 Series

*Inline Relief Valves
10 to 2400 psig*



Features


- Zero leakage up to 95% of cracking pressure
- Positive reseal at high percentage of cracking pressure
- Accurate set pressure
- Wide range of cracking pressure
- Tamper-proof adjustment

Technical Data

Body Construction Materials	Brass, steel, 303 or 316 stainless steel
O-ring Materials	Buna N, ethylene propylene, neoprene, Teflon®, and Viton®
Spring Material	17-7 PH stainless steel
Operating Pressure	0 to 2400 psig (166 BAR)
Proof Pressure	3600 psig (248 BAR)
Burst Pressure	Over 5000 psig (345 BAR)
Temperature Range	-320° F to +400° F (-196° C to +204° F) <i>Based on o-ring material, see "How to Order"</i>
Connection Sizes	1/8" to 1 1/4"


Note: Proper filtration is recommended to prevent damage to sealing surfaces.

How it Works




Closed

The spring load is carried by a metal-to-metal stop. The o-ring provides a leak-tight seal. Sealing efficiency increases as the pressure increases up to the cracking pressure.



Cracking

The ports in poppet open fully and eliminate rapid increase in the pressure. The flow is throttled between the poppet shoulder and the seat, which provides regularly increasing flow area with increasing flow rates.



Open

The inline construction and full flow ports permit maximum flow with minimum increase in the system pressure.

relief valves

Circle Seal Controls

2301 Wardlow Circle • PO Box 3300 • Corona, CA 92880

Phone (951) 270-6200 Fax (951) 270-6201

www.circle-seal.com

5100 Series

Cracking Pressure Spring Ranges

Consult your local distributor or the factory for replacement spring part numbers. (Please have your complete valve part number ready when calling.)

Cracking Pressure Ranges

10–15	82–117	346–450	1201–1400
16–24	118–162	451–575	1401–1900
25–41	163–230	576–710	1901–2400
42–57	231–285	711–999	
58–81	286–345	1000–1200	

Adjustment

The 5100 Series relief valve is adjustable to $\pm 15\%$ of its nominal cracking pressure as follows:

1. Remove discharge line (in-line mounted unit) or override ring & rod (ASME type)
2. "Break" body joint by wrenching hexes. DO NOT USE PIPE WRENCH.
3. Insert proper size hex wrench (see table) into the outlet end and turn clockwise to increase the cracking pressure, or counterclockwise to decrease.
4. After adjustment, hold the hex wrench stationary relative to the inlet end and turn the body to tighten the joint.
5. Test adjusted unit for cracking pressure.

Hex Wrench Size

Size	Nominal Cracking Pressure	
	450 & Under	451 & Over
1/8"	7/32"	7/32"
1/4"	5/16"	1/4"
3/8"	5/16"	1/4"
1/2"	1/2"	3/8"
3/4"	9/16"	1/2"
1"	9/16"	1/2"
1 1/4"	3/4"	3/4"

Air Flow Rates (5100MP)

Inline valves, 1/8"–1"


Crack Pressure PSIG	Percent Over Pressure Beyond Cracking (SCFM air at room temperature)							
	10%				25%			
	1MP	2MP/3MP	4MP	6MP/8MP	1MP	2MP/3MP	4MP	6MP/8MP
15	1.0	1.5	5.0	9.0	3.0	5.0	50	52
20	1.5	2.0	10	12	4.0	5.0	60	63
25	2.0	2.7	25	27	5.4	6.5	65	67
30	2.4	4.6	30	36	6.2	13	68	71
40	3.0	5.5	34	55	6.5	25	72	100
50	3.0	10.5	40	65	8.0	29	74	110
75	4.2	14	50	70	13	38	80	114
100	6.0	25	54	90	17	55	90	130
125	8.5	32	70	120	22	58	110	136
150	10	36	72	150	27	78	115	200
200	13	40	135	190	40	96	250	375
250	16	50	150	210	43	115	280	450
300	20	60	180	225	52	127	400	600
400	25	80	270	270	68	150	600	900
500	36	46	110	190	108	120	320	700
750	45	58	130	210	90	130	420	1200
1000	47	64	170	210	160	160	620	1280
1200	67	74	240	250	200	200	1000	1500
1400	84	84	450	3950	—	—	—	—
1600	110	110	720	4050	—	—	—	—
1800	160	160	810	5100	—	—	—	—
2000	190	190	850	5150	—	—	—	—
2200	220	220	900	5200	—	—	—	—
2400	240	240	990	6750	—	—	—	—

5100 Series

Replacement Parts

Dimensions (inches)

MP

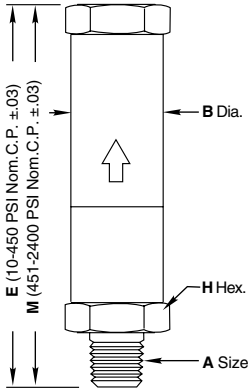


5100 Series, Inline

Prod. No.	A	E	M	B Dia. H Hex
-1MP	1/8"	2.89	3.49*	0.81*
-2MP	1/4"	3.34	4.24	1.00
-3MP	3/8"	3.36	4.26	1.00
-4MP	1/2"	4.15	5.05	1.25
-6MP	3/4"	5.61	7.11	1.50
-8MP	1"	5.79	7.29*	1.50
-10MP	1 1/4"*	7.46	10.22	2.00

* 1/8" size: for cracking pressure 1201–2400 psig, 'M' is 3.95, 'B' and 'H' are 1.00
 1" size: for cracking pressure 1201–2400 psig, 'M' is 7.32
 1 1/4" size: not available above 1200 psig


M

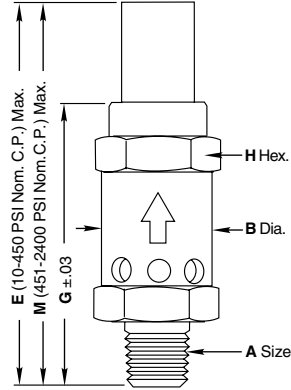

5100 Series, Popoff

Prod. No.	A	E	M	G	B Dia. H Hex
-1M	1/8"	2.56	3.16*	2.39*	0.81*
-2M	1/4"	2.87	3.77	2.65	1.00
-3M	3/8"	2.89	3.79	2.74	1.00
-4M	1/2"	3.59	4.49	3.27	1.25
-6M	3/4"	5.00	6.50	4.16	1.50
-8M	1"	5.18	6.68	4.34	1.50
-10M	1 1/4"*	6.70	8.65	4.96	2.00


* 1/8" size: for cracking pressure 1201–2400 psig, 'M' is 3.58, 'G' is 2.48, 'B' and 'H' are 1.00
 1 1/4" size: not available above 1200 psig

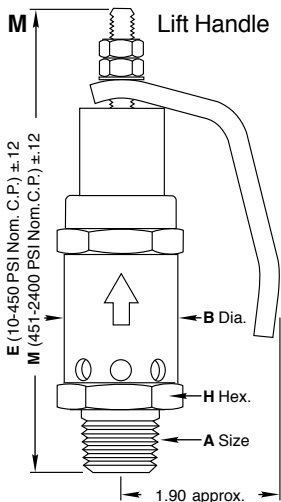

M5100 Series, Popoff with Manual Override





Prod. No.	A	E	M	B Dia. H Hex
-1M	1/8"	2.84	3.45*	0.81*
-2M	1/4"	3.16	4.06	1.00
-3M	3/8"	3.19	4.09	1.00
-4M	1/2"	3.86	5.51	1.25
-6M	3/4"	5.41	7.54	1.50
-8M	1"	5.59	7.72	1.50
-10M	1 1/4"*	6.95	10.42	2.00

* 1/8" size: for cracking pressure 1201–2400 psig, 'M' is 3.84, 'B' and 'H' are 1.00
 1 1/4" size: not available above 1200 psig

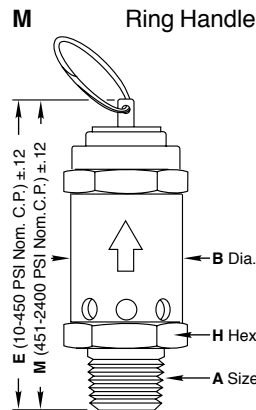




5100 Series

Hydraulic Flow Curves

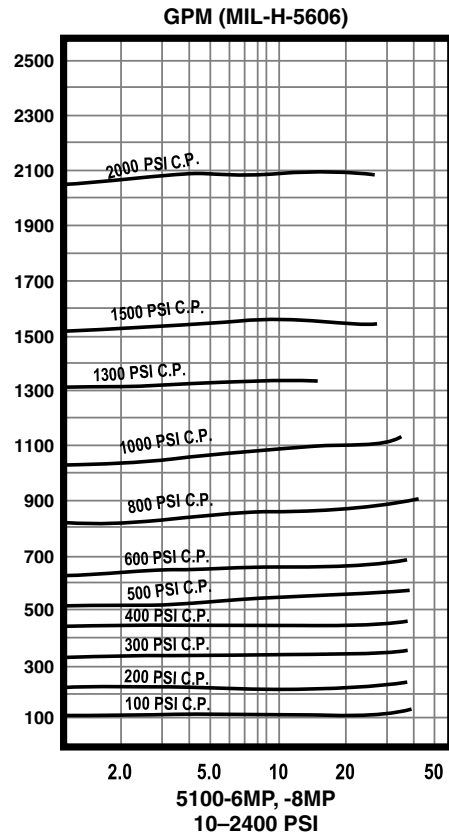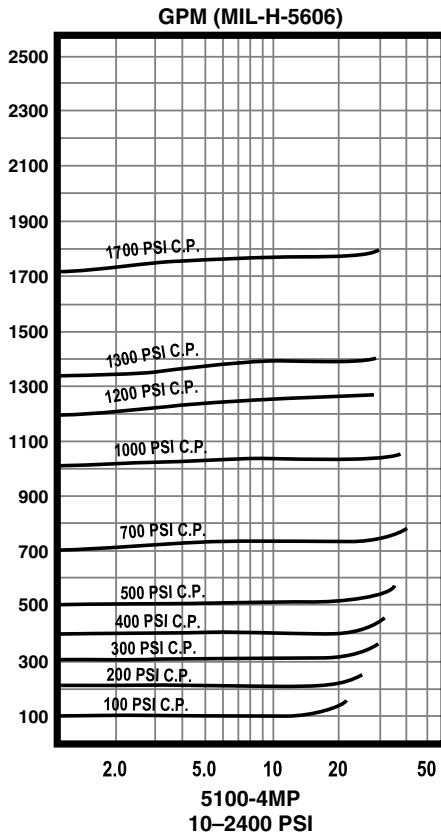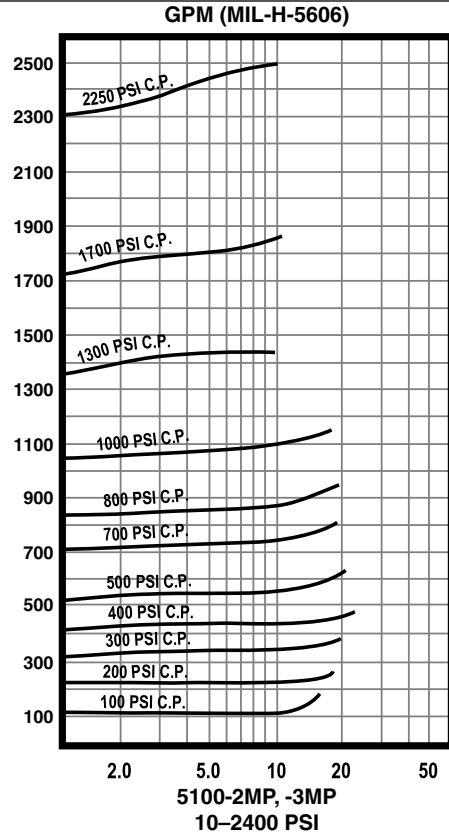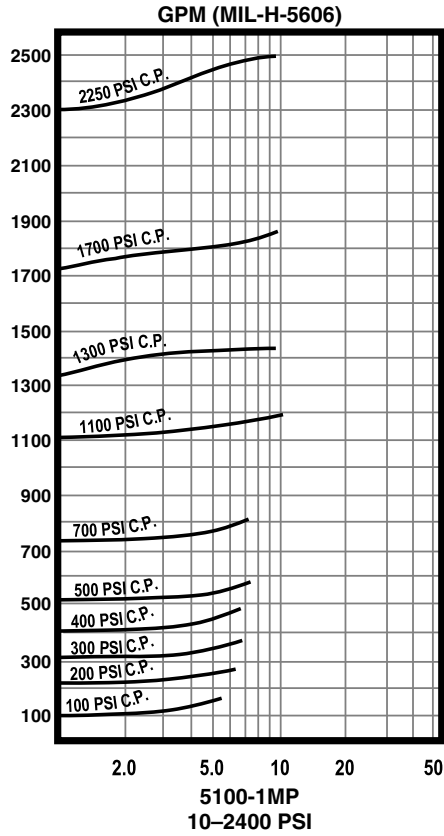

5100 Series

Cracking & Reseal Pressure

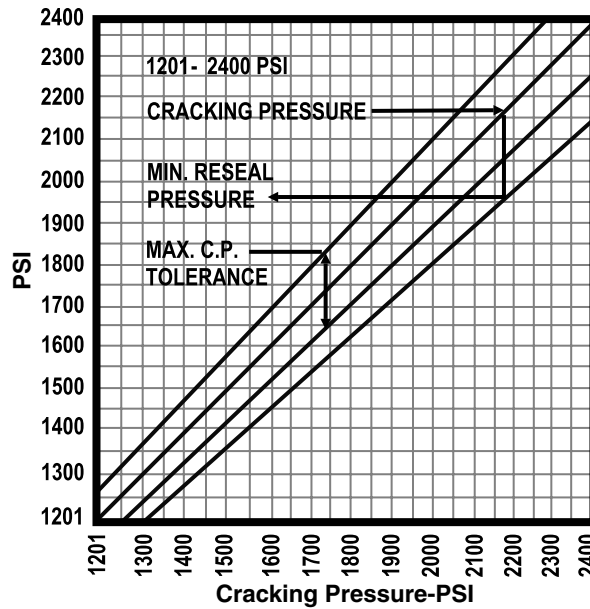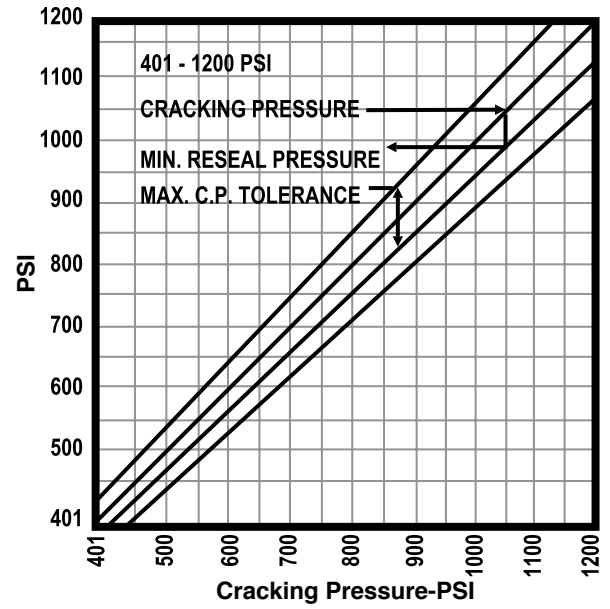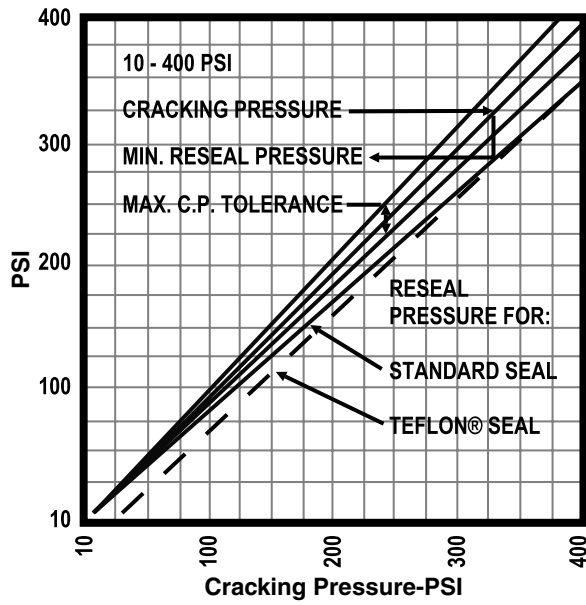


Definitions

1. *Cracking pressure* is defined as 5cc/min with gas (0.2 scfm for 5120 Series)
2. *Reseat point* is the point at which the valve closes, cutting off virtually all flow.
3. The *reseal point* is the point at which the valve seals absolutely tight so that there is no leakage detectable by normal means of measurement.

5100 Series

How to Order

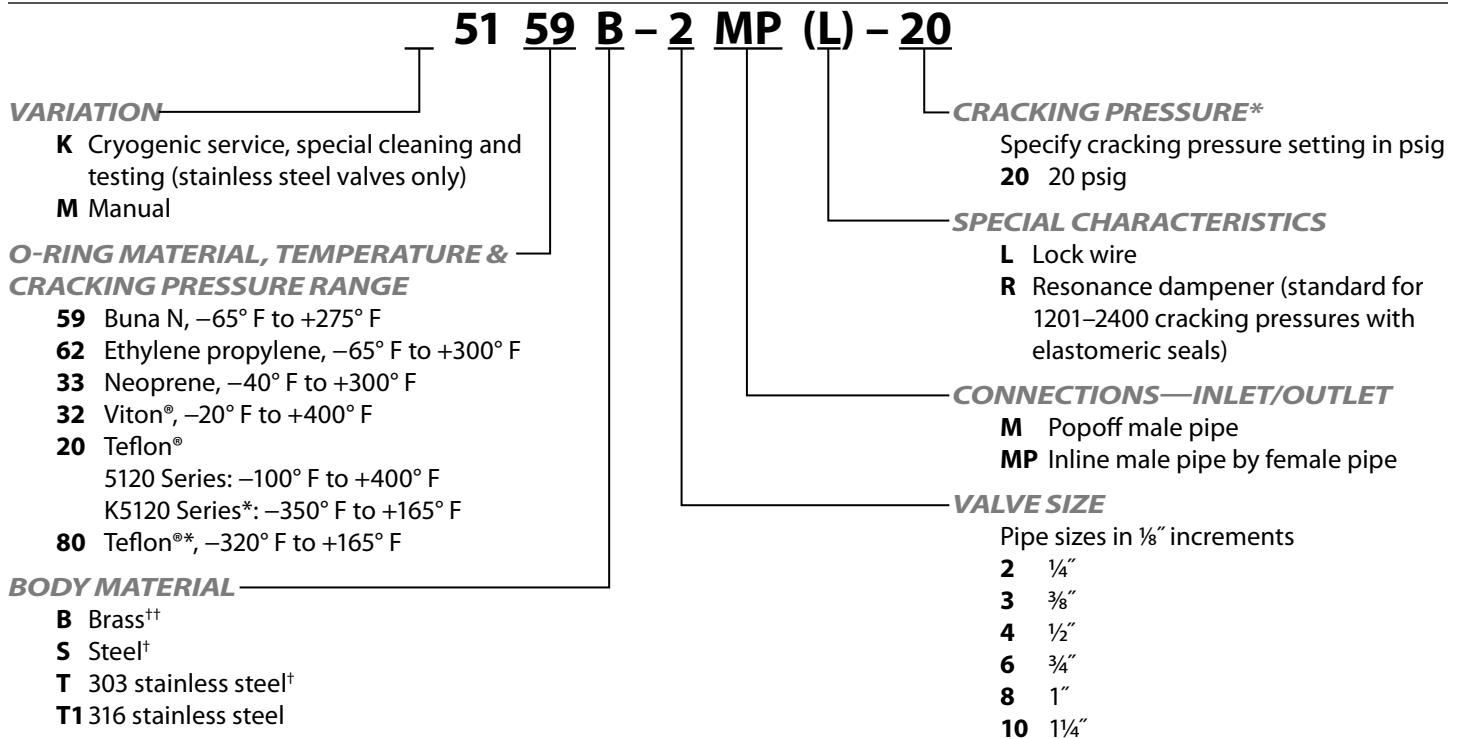

* Unit is not rated for liquid cryogenic service below -100° F.

† Not available for PED applications

†† For PED applications, brass bodies are limited to a maximum temperature use of +100° F (+38° C)

O-rings of Teflon®: Minimum cracking pressure is 20 psi; not available for use above 1200 psi in 3/4" and larger sizes.

Repair Kit

In normal service, the only part(s) which may require replacement is(are) the seal(s). A repair kit may be ordered by placing a 'K/' in front of the complete part number (i.e. K/5159B-2MP-20).

Please consult your Circle Seal Controls Distributor or our factory for information on special connections, materials, sizes, o-rings, operating pressures and temperature ranges.

Cracking Pressure Tolerance: ±5%

Cracking pressures below 20 psig have a tolerance of ±20%.

Flow at cracking pressure: Elastomeric seals = 5cc/min

Teflon® seals = 0.02 scfm

Reseal pressure**

	<u>Crack Pressure</u>	<u>Reseal Pressures</u>
Elastomeric seals	C.P. > 100 psi	90% of C.P.
	C.P. < 100 psi	70% to 89% of C.P.
Teflon® seals	C.P. > 450 psi	90% of C.P.
	C.P. < 450 psi	52% to 90% of C.P.

** The reseal point is the point at which the valve seals absolutely tight so that there is no leakage detectable by normal means of measurement. The point at which the valve closes, cutting off virtually all flow, is called the reseal point. The reseal point is substantially above the reseat.

Leakage at reseal pressure

Elastomeric seals Ascending pressure = zero up to 95% of cracking pressure

Descending pressure = zero at reseal and below

Teflon® seals Ascending pressure = zero up to reseal pressure, then 10cc/min between reseal and cracking pressure

Descending pressure = zero at reseal, except with cracking pressure below 451 psi, then 1cc/min maximum

First crack pressure after standing unactuated for a prolong period

Set pressure of...	5-19 psi	125% of cracking pressure
	20-29 psi	120% of cracking pressure
	30-49 psi	115% of cracking pressure
	50 psi and higher	110% of cracking pressure

For Your Safety

It is solely the responsibility of the system designer and user to select products suitable for their specific application requirements and to ensure proper installation, operation, and maintenance of these products. Material compatibility, product ratings and application details should be considered in the selection. Improper selection or use of products described herein can cause personal injury or property damage.

Viton® is a registered trademark of DuPont Dow Elastomers.

Teflon® is a registered trademark of the DuPont Company.